


KULDEBESTANDIG - MEGET VARM - KOMFORTABEL



TEKNISKE EGENSKAPER

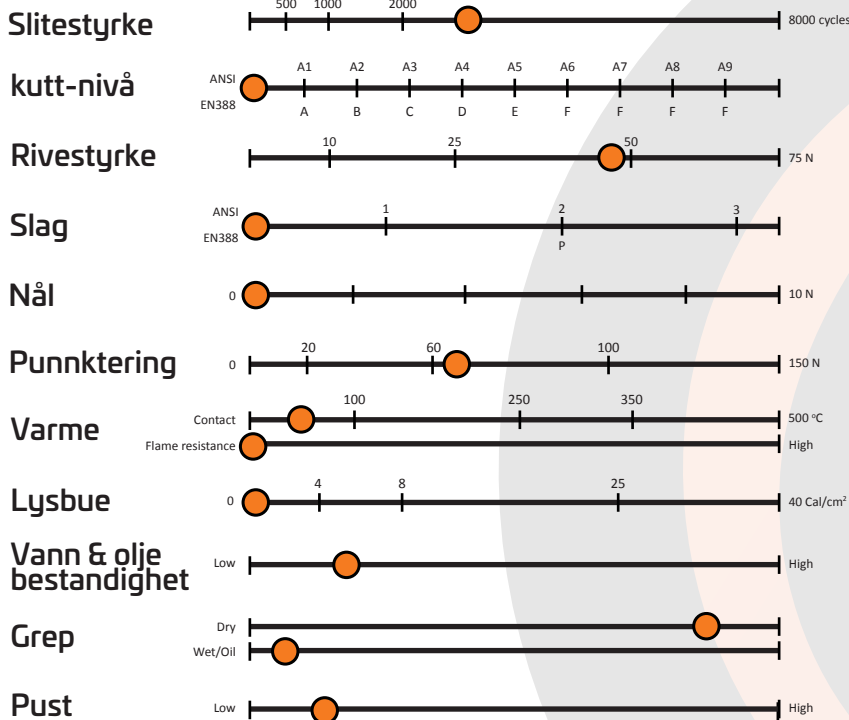

EN388



3222


EN511



24X

A: ABRASION (1-4)
B: CUT (1-5)
C: TEAR (1-4)
D: PUNCTURE (1-4)
F: ISO CUT (A-F)
P: IMPACT PROTECTION

ISO Cut force (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N



ART.NO: MFNWIN
60 par (5 dusin)